

# PV Disconnect 440-40-3

Box with DC Disconnect Switch and optional lightning surge protection

## ORDER INFORMATION

- **Item no.:** 19-000138    **product name:** PV Disconnect 440-40-3
- **Item no.:** 19-002120    **product name:** MNSPD-115
- **Item no.:** 19-002130    **product name:** MNSPD-300
- **Item no.:** 19-002140    **product name:** MNSPD-600

Lightning surge protectors must be ordered separately

## FEATURES


- Designed for PS2-150 to PS2-4000
- For professional installation of pumping systems

## TECHNICAL DATA

- DC rated disconnect switch enclosed
- Enclosure class IP 54
- Meets the requirements for CE

Max. voltage	440 V DC
Max. current per string	15 A
Max. total current	40 A
Max. no. of strings	3
String cable size	2,5 - 4 mm <sup>2</sup>
Output cable size	4 - 10 mm <sup>2</sup>


## DIMENSION/WEIGHT [mm]

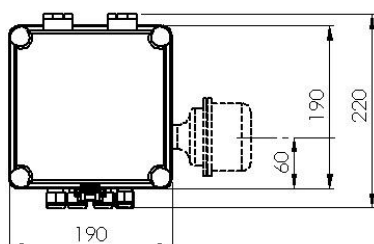

### Optional lightning surge protector

- Connects through an existing mounting hole in the PV connect housing
- Proper grounding of the device is mandatory to achieve protection

Controller	MidNite surge protector
PS2 150 – PS2 200	MNSPD115
PS2 600 – PS2 1800	MNSPD300
PS2 4000	MNSPD600

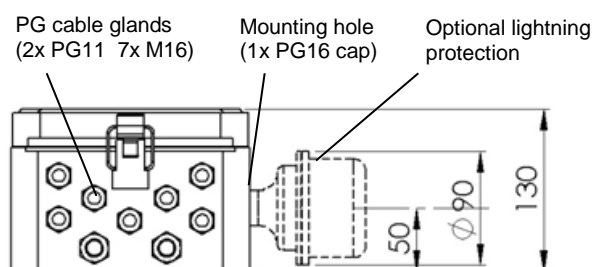

Net. Weight: 1,6kg (+0,35kg)

**BERNT LORENTZ GmbH & Co. KG**  
 Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany  
 Tel +49 (0)4193 8806-700, [www.lorentz.de](http://www.lorentz.de)

**Sun. Water. Life.**

All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations